



Optimal number of remanufacturing in a circular economy platform

Elif Cesur^a, Muhammet Rasit Cesur^b, Yasanur Kayikci ^c and Sachin K. Mangla^d

^aDepartment of Industrial Engineering, Istanbul Medeniyet University, Istanbul, Turkey; ^bDepartment of Industrial Engineering, Sakarya University, Sakarya, Turkey; ^cDepartment of Industrial Engineering, Turkish-German University, Istanbul, Turkey; ^dFaculty of Knowledge Management and Business Decision Making, University of Plymouth, Plymouth, UK

ABSTRACT

In reducing waste and protecting natural resources benefits in a circular economy platform, performing remanufacturing tasks are complex, as it may be associated with costs such as investment, setup and disposal cost. Thus, many studies those aims to find the optimal number of remanufacturing has been investigated whether it is an infinite or a constant number of remanufacturing via trial-and-error method. During the investigation, the disposal rate is assumed as a fixed value for each unique case, which needs further focus. The current study aims to propose a novel decision model to figure out an optimal number of remanufacturing regarding to the various ratio of used units returned for recovery. The proposed model was extended in context of remanufacturing opportunities of PVC products. The obtained findings are useful for companies in managing remanufacturing processes by knowing optimal remanufacturing times, and results in enhanced economic–ecological–social gains in the circular economy.

ARTICLE HISTORY

Received 9 June 2020

Accepted 12 September 2020

KEYWORDS

Circular economy;
remanufacturing rate;
optimal remanufacturing
times; sustainable
production; green supply
chain; PVC products

1. Introduction

Remanufacturing proves to be a significant process for sustainable production systems because of the benefits of reducing resource consumption (Lei, Guoyu, and Chenxu 2018), energy conservation (Zhu et al. 2019), carbon emission (Zhang et al. 2020) and production lead-time (Singhal, Tripathy, and Jena 2020). Remanufacturing requires the purchase of used products from the end user at the end of their current life cycle so that added value can be recovered and products can be returned to functional use again (Jayaraman, Ross, and Agarwal 2008). Effective management of this process can generate huge economic–ecological–social gains for manufacturing systems that cannot be ignored (Fleischmann et al. 1997). Therefore, the subject of remanufacturing is among a focal area of research for scholars all across the globe (Govindan, Soleimani, and Kannan 2015).

In the era of the circular economy, the high-speed flow of products in the supply chain due to the increase in customer demand leads to over-utilisation of natural resources (El Saadany and Jaber 2010). Hence, industries have proposed some solutions for extracting maximal value from resources in use, which are mostly included in the field of supply chain and logistics management, not only to manage this improvement and to find the best possible cost reduction methods but also to collect used and returned items to recover or repair the used product (Madaan, Kumar, and Chan 2012; Bhattacharjee and Cruz 2015). As an open and digital marketplace, the circular economy platform plays a prominent role to bring companies together and to support their collaborative activities

through circularity (Schwanzhof and Leipold 2020) such as to use secondary raw materials of the material from one industry to another industry (Genovese et al. 2017; Kazancoglu et al. 2020). Adding to that, Teunter (2001) stated that remanufacturing has become more popular among practitioners due to strict environmental regulations and interest in environmentally friendly practices. The critical problem in recoverable manufacturing involving remanufacturing is easy access to used products (Jayaraman, Ross, and Agarwal 2008); therefore, the circular economy platform is required to meet right remanufacturing partners. There is a growing trend especially among large companies to include remanufacturing in their businesses for competitive gains. Furthermore, the remanufactured products or components can achieve even better performance and quality than a new one (Wang et al. 2020) as they save almost 50% of the energy, 33% of the labour force and up to 80% raw materials compared with the newly manufactured products (Liu et al. 2019; Van Nguyen et al. 2020) and cost usually up to 50%–70% less than the new one (Cao et al. 2020). For instance, in Germany, almost 10% of automobile parts, like engines, starter engines, or alternators, are remanufactured (Bras 2007). Several car manufacturers, including BMW and Volkswagen, offer remanufactured engines and other parts as fully warranted service parts (Flapper, van Nunen, and van Wassenhove 2006), and they aim to accelerate the upgrading of older cars and boost domestic demand (Li et al. 2019). In nutshell, companies benefit from both manufacturing and remanufacturing to make more profit.

From this point of view, the purpose of this research is to derive the optimal number of remanufacturing and to place the corresponding several remanufacture rates for the circular economy platform to enhance green and sustainable supply chain management. This can prevent economically expired products, as those have reached the end-of-life for remanufacturing, from being put into production. In addition, the rate of waste or poor quality may cause an increased cost in each remanufacturing process to which the material will be exposed (Zhang et al. 2020). Therefore, remanufacturing can be performed only for a finite number of times, because the product is no longer economically feasible or practical to remanufacture. Due to the chemical properties of materials and the conditions of the production processes, materials may not be suitable to remanufacture after a certain number. At this point, manufacturing or remanufacturing trade-off must be taken into account in a remanufacturing model that aims to minimise the total cost; otherwise, it should be replaced with a newly manufactured product.

This research raises the following research questions:

RQ1: How many times a product can be remanufactured optimally?

RQ2: Can the remanufacturing rate (β) be considered as a variable parameter expressed by a linear function?

RQ3: Which parameters are used to calculate the optimal number of remanufacturing, and further what are the effects of these parameters in determining optimal number of remanufacturing times?

In this study, we developed a decision model. Also, various scenarios in order to measure the effect of used parameters in the model are generated. Finally, the model is also illustrated with simulation experiments. Furthermore, the result of the simulation experiment is present to prove the applicability of the model. The central methodological contribution of this study highlights that a product can be remanufactured a finite number of times and find the optimal number of remanufacturing, secondly discovers optimal times considering the variability of remanufacturing rate in the progress of time.

The remainder of this paper is organised as follows: Section 2 provides a literature review, which discusses the major research on remanufacturing models and highlights the research gap. Section 3 gives the problem definition and theoretical backgrounds and develops the proposed model for the optimal number of remanufacturing. This is followed by Section 4, which describes a simulation experiment with scenarios to use in this study. Then, Section 5 discusses the results and gives more managerial insights into the effects of different parameters on optimal remanufacturing times. The paper summarises and concludes the entire work in Section 6.

2. Literature review

Practicing a green and sustainable supply chain is an important step in improving the competitive image of the companies amidst global climate change pressures (Gandhi et al. 2016; Genovese et al. 2017). One of the green and sustainable supply chain practices is the closed-loop supply chain, which engages in the practice of taking back products from customers and returning them to the original manufactures in exchange for value by reusing whole or part of the products (Zhen, Huang, and Wang 2019; Islam et al. 2020). There is a large volume of published studies describing the closed-loop supply chain management in the field of both business and science (Ilgin and Gupta 2010; Govindan, Soleimani, and Kannan 2015), where remanufacturing is a sustainable and profitable practice for product recovery and also still nascent area notably in the developing countries and even in some developed countries (Rathore, Kota, and Chakrabarti 2011; Abdulrahman et al. 2015). Remanufacturing recovers a product as a whole and brings it up to an 'as-new' quality (Teunter 2002). A lot of remanufacturing-related research has developed models for a variety of performance analysis and remanufacturing decision problems (Ilgin and Gupta 2012; Sitcharangsie, Ijomah, and Wong 2019; Assid, Gharbi, and Hajji 2019). The first model with item returns was conducted by Schrady (1967), who developed an Economic Order Quantity (EOQ) model for stock management of the repairable items that determines the optimal quantity of units to be supplied and repaired. Nahmias and Rivera (1979) improved this model by restricting the number of repair or recycling times. Richter (1996b) carried out several investigations into the EOQ repair and waste disposal model. In his next studies, he enhanced the EOQ model by adding various setup numbers (Richter 1996a) as well as by analysing both pure and mixed strategies (Richter 1997), and the optimal number of remanufacturing based upon the different values of the return rate was determined. In this study, Richter (1997) offers two strategies for a pure policy called bang-bang policy: it assumes either 'dispose all policy', which means that there is no any product which can be remanufactured, or 'recover all policy', which means that all products will be remanufactured; in other words, there is not any waste disposal at the place. Teunter (2001) based his study upon Schrady (1967); however, their study handled the policy differently and defined two-unit lots, which are manufacturing lot and remanufacturing lot. Besides, their study evaluated the disposal rate and differentiated the holding cost in terms of manufacturing case and remanufacturing case. Moreover, Dobos and Richter (2004) investigated on manufacturing/remanufacturing model not only taking into account a constantly demanded product and given back product rate but also dealing with the linear total cost function. El Saadany and Jaber (2008) examined the optimal amount of production and product, which are recovered from the market by using the EOQ model. This paper defines a cycle, which is composed of manufacturing and remanufacturing steps, and this cycle first starts with producing new units. Then, the collected products will be added to the finished product stocks after remanufacturing. In a later study of El Saadany and Jaber (2010), they claimed that the quality and price of products affect the quantity of returned products. Besides, they pointed out at the same time that the mixed strategy, which means the combination of both manufacturing and remanufacturing, is more efficient than the pure (recover/dispose) strategy. Ilgin and Gupta (2010) analysed that remanufacturing involves the accurate estimation of product returns, production planning and scheduling, capacity planning, and inventory management. Further, El Saadany, Jaber, and Bonney (2013) put a new study forward which is about finding out the number of optimal manufacturing and remanufacturing times. This kind of problem has emerged because of the trade of two fundamental cost parameters: investment cost and remanufacturing cost. Meanwhile, the finite remanufacturing assumption causes a significant erroneous which increases depending on the number of returned items. Guo and Ya (2015) developed a hybrid model to analyse optimal strategies for manufacturing and remanufacturing, where the demand rate is constant and the remanufacturing cost, and the returns rate and the buyback cost depends on the minimum quality level of recycled products. Bazan, Jaber, and El Saadany (2015) studied the effect of factors such as carbon emissions and energy effects on manufacturing–remanufacturing decision in a proposed model; then, this model was

improved with a two-level closed-loop supply chain by Bazan, Jaber, and Zaroni (2017) considering energy factors used for manufacturing and remanufacturing as well as greenhouse gas emissions from manufacturing, remanufacturing and transportation activities. In conclusion, this model was improved by Hasanov, Jaber, and Tahirov (2019) with four-level closed-loop supply chain with remanufacturing, and they found out that savings can be more substantial, if such a tax and subsidies are accounted in the developed model, as the number of remanufacturing times increases. Farahani, Otieno, and Omwando (2019) developed an optimal disposition policy for remanufacturing systems with variable quality grades of product returns and a limited recoverable products inventory capacity. Liu et al. (2019) proposed optimal pricing and production strategies for new and remanufactured products under a non-renewing free replacement warranty. Lieckens, Colen, and Lambrecht (2013) built a stochastic, profit-maximising model to determine the optimal remanufacturing network design with an exchange option for fast- and slow-moving part types.

After reviewing the existing literature in the field of remanufacturing, the research gap shows that no research conducted to propose a model to show how many times a product should be remanufactured. This model can help to meet the requirements of green and sustainable supply chain management as well as to find appropriate remanufacturing partners on the circular economy platform. In addition, the remanufacturing rate in the existing literature is taken as a fixed value rather than being variable.

3. The proposed model

In this section, the model for the optimal number of remanufacturing is described in detail. Problem definition, theoretical background and model proposal are also given.

3.1. Problem definition

In the literature, most of the studies on the closed-loop supply chain acknowledge that a product could be remanufactured in an unlimited number of times. However, El Saadany, Jaber, and Bonney (2013) not only claimed that it does not reflect the truth but also developed a model of unit, which shows that a product can be remanufactured in a certain number of times. Also, Teunter (2001) proposed a model with a certain lot size for remanufacturing with taking into account manufacturing and remanufacturing costs.

In our study, the proposed model is developed in a setting with limited remanufacturability based on the extension of El Saadany, Jaber, and Bonney (2013) and Teunter (2001)'s models in terms of three aspects as follows:

- (1) The disposal rate is variable per unit time.
- (2) A product can be remanufactured with an optimal number of times. This can be calculated by using a mathematical formulation instead of a numerical analysis with the trial-and-error method, which causes a huge computational workload. It is not possible to consider all alternative results during the numerical analysis, so the optimal solution may not be considered.
- (3) The fractional amount of items namely the remanufacturing rate, which is recovered, could be defined with a linear function, which is much suitable to model real-life cases.

3.2. Theoretical background

To explain the theoretical background of the study, two seminar works of El Saadany, Jaber, and Bonney (2013) and Teunter (2001) are considered as the basis. The models offered by these two seminar works are investigated comprehensively to put forward the contribution of this research.

Table 1. Notation of El Saadany, Jaber, and Bonney (2013)'s model.

Symbol	Explanation
β	Fractional amount of items, which are recovered ($0 < \beta < 1$)
ζ	Number of times an item can be remanufactured
β_ζ	Fractional amount of items, which are recovered ζ times ($0 < \beta_\zeta < \beta$)
α	Ratio of disposed item, ($0 < \alpha < \beta$)
d	Demand

3.2.1. The model of El Saadany, Jaber, and Bonney (2013)

The proposed model of El Saadany, Jaber, and Bonney (2013) covers the effects of a limited remanufacturability on the material flows in a production remanufacturing system. For this model, notations are listed in Table 1 as follows:

First, it is supposed that the system delivers a constant demand d to the market. The used products are recovered from the market and delivered to the repairable product store. An amount αd is disposed items, while the rest of the recovered items, i.e. the amount $\beta_\zeta d$ is remanufactured and transferred to a finished product store. In order to meet the required demand, the amount $(1 - \beta_\zeta)d$ must be manufactured. In classic models, there are no restrictions on remanufacturing, and a proportion β is remanufactured (remanufacturing rate) and the proportion $(1 - \beta)$ is disposed (disposal rate). Hence, β and β_ζ are identical in that case, whereas limited remanufacturing is modeled by defining the variable ζ , which denotes the number of times an item is remanufactured and they assume that a product can only be remanufactured for ζ times. The basic model with the used variables for production and remanufacturing system is presented in Figure 1, which is adapted from El Saadany, Jaber, and Bonney (2013).

3.2.2. The model of Teunter (2001)

The effects of remanufacturability are examined on the basis of the model of Teunter (2001) as the second model. This model is an extension of the classic EOQ model for recovery systems by Schrady (1967). In addition to this model, they defines different holding costs such as the holding cost per manufactured item (h_m), holding cost per remanufactured item (h_r) and different unit costs such as the unit cost of manufacturing per item (c_m), unit cost of remanufacturing per item (c_r), and disposal cost per item (c_d) for holding newly manufactured items and remanufactured items. Teunter (2001) argues that remanufactured products actually have not the same quality as new items but still ignored quality effect on the formulation and the remanufacturing cost is usually lower than that of manufacturing costs. Therefore, the holding costs, which are mainly opportunity cost, are lower for

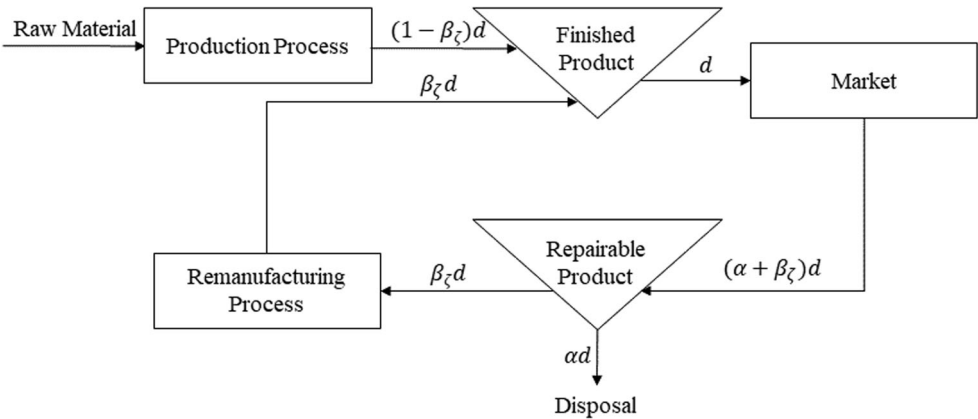


Figure 1. Material flow of a single item for production and remanufacturing system.

recovered items. By contrast to the model of Schradley (1967), Teunter (2001) examines a sequence of R remanufacturing cycles with lot size Q_r and M manufacturing cycles with lot size Q_m . The systems serve a market with the demand rate d . The lots are manufactured and remanufactured at infinite rate; i.e. whenever a lot is produced, the respective lot size is added instantaneously to the finished product store. After this, the finished product store empties with the demand rate d .

After introducing two significant papers that form the basis of our study, the differences of this study can be emphasised in terms of two aspects:

- (i) El Saadany, Jaber, and Bonney (2013) just focused on predicting the number of remanufacturing times by performing numerical analysis instead of finding an optimal number of remanufacturing such as when $\zeta=1, 2, 3$, and ∞ . Meanwhile, Teunter (2001) tried to find lot size by minimising the total cost formulation that includes variable cost, fixed cost, unit cost and disposal cost. However, their study did not tackle the addressed problem as a discovery of the optimal number of remanufacturing times. On the other hand, El Saadany, Jaber, and Bonney (2013) determined remanufacturing, production and disposal amount as given in Table 2 in every period when a product is recovered once ($\zeta=1$), twice ($\zeta=2$) and three times ($\zeta=3$).
- (ii) The main point is that they assumed β ratio always the same and a value between $0 < \beta < 1$. However, β value does not always have to be the same. Because of the seasonality or economic fluctuations, β value could be variable and even it can be defined as a linear or non-linear function instead of a specific value. At this stage, β value is taken as a linear equation within the scope of this study by finding the number of products that are collected from outside to recover process.

Table 2. Remanufacturing, production and disposal amount in every period when a product is recovered once ($\zeta = 1$), twice ($\zeta = 2$) and three times ($\zeta = 3$).

$\zeta=0$			
Production			
Age	Amount		
0	d		
1	0		
2	0		
Disposed			
$\zeta=1$		$\zeta=1$	
Remanufacturing		Production	
Age	Amount	Age	Amount
0		0	$(1-\beta)d$
1	βd	1	βd
2	0	2	0
Disposed	$(1-\beta)d$	Disposed	
$\zeta=2$		$\zeta=2$	
Remanufacturing		Production	
Age	Amount	Age	Amount
0		0	$(1-\beta)d$
1	$\beta(1-\beta)d$	1	$\beta(1-\beta)d$
2	$\beta^2 d$	2	$\beta^2 d$
Disposed	$(1-\beta)d$	Disposed	
$\zeta=3$		$\zeta=3$	
Remanufacturing		Production	
Age	Amount	Age	Amount
0		0	$(1-\beta+\beta^3)d$
1	$\beta(1-\beta)d$	1	$\beta(1-\beta)d$
2	$\beta^2(1-\beta)d$	2	$\beta^2(1-\beta)d$
Disposed	$(1-\beta+\beta^3)d$	Disposed	

3.3. Decision model formulation

Total cost minimisation will be achieved by finding the optimal number of remanufacturing times which should be determined by minimising the unit cost instead of the total cost, as the total cost will increase when remanufacturing occurs. At the point, where the unit cost is minimised, the number of remanufacturing times could be calculated as a dependent variable while the independent variables to be used in the calculations are setup cost, holding cost, disposal rate, and production quantity. For this model, the notations used throughout the paper are listed in Table 3. In this model, some limitations are available are listed below:

- (i) The glass, metal, or aluminium products are not selected to remanufacture as their raw metals can be recycled by an infinite number of times.
- (ii) Although different demand alternatives are analysed in simulation part, however, demand is constant for each scenario.
- (iii) Cost parameters for both remanufacturing and manufacturing are collected under two headings: setup cost and variable cost. Meaning that other cost parameters such as holding cost, ordering cost, and transportation cost are not considered specifically.
- (iv) In this study, ' β ' value the amount of products that are collected from outside to remanufacture is taken as a linear equation.

Because the optimal number of remanufacturing times will be calculated based on the point where the unit cost is minimised, in the objective function of the unit cost equation, the number of remanufacturing times should be a dependent variable as defined before. Furthermore, there is a need to establish a relationship between the other parameters establishing the unit cost equation such as fixed costs, variable costs, demand and remanufacturing rate with the number of remanufacturing times. The fixed cost is directly related to production rate, and remanufacturing rate in the unit cost equation will be divided by total demand whereas variable costs are multiplied by the production and the remanufacturing rate since the variable costs will be associated with the remanufacturing rate. When the relationship between the remanufacturing rate and the number of remanufacturing times is established, the optimal number of remanufacturing times could be possible to calculate. In the study, it is assumed that there will be a linear relationship (e.g. $y = ax + b$) between these two parameters, as seen in equation (1). When the number of remanufacturing (ς) and the coefficient of the regression equation (a) are multiplied and summed up with a constant value (b), the remanufacturing rate (β_ς) is obtained.

$$\beta_\varsigma = a\varsigma + b \tag{1}$$

The formula of the unit cost to be used as the objective function in cost optimisation is shown in equation (2). The unit cost is equal to the total of unit manufacturing setup cost, unit

Table 3. Notation of proposed model.

Symbol	Explanation
D	Demand
S_m	Manufacturing setup cost
S_r	Remanufacturing setup cost
V_m	Manufacturing variable cost
V_r	Remanufacturing variable cost
β_ς	Remanufacturing rate at the time ζ
β	Remanufacturing rate
a	Coefficient of the regression equation
b	Constant value
x	Number of remanufacturing
ζ	Number of times an item can be remanufactured

remanufacturing setup cost, unit manufacturing variable cost and unit remanufacturing variable cost. The unit manufacturing setup cost is estimated by calculating the ratio of the manufacturing setup cost (S_m) to the total production quantity, the ratio of waste to product ($1 - \beta_s$) and the demand (D). The unit remanufacturing setup cost is calculated by calculating the ratio of the remanufacturing setup cost (S_r) to the multiplication of demand and the remanufacturing rate, which is the total remanufacturing quantity. The unit manufacturing variable cost is equal to the manufacturing variable cost (V_m) multiplied by the waste rate. The unit remanufacturing variable cost (V_r) is the product of the unit remanufacturing variable cost and the remanufacturing rate.

$$\frac{S_m}{(1 - \beta_s)D} + \frac{S_r}{\beta_s D} + V_m(1 - \beta_s) + V_r \beta_s \quad (2)$$

The equation above represents the unit cost formulation by taking into account setup cost and variable cost for both manufacturing and remanufacturing processes. However, a constraint should be inserted into the mathematical formulation given in equation (3). The reason behind this constraint is that the remanufacturing unit cost must be less than the manufacturing unit cost. The cost of manufacturing is always available regardless of whether the remanufacturing process occurs or not. In order to take a remanufacturing decision of any product, the unit cost of remanufacturing should not exceed the cost of production cost.

$$S_m + V_m D \geq S_m + S_r + V_m(1 - \beta_s)D + V_r \beta_s D \quad (3)$$

From equation (4) to equation (8), the constraint given in equation (3) is rearranged systematically.

$$S_m + V_m D - S_m - S_r - V_m(1 - \beta_s)D - V_r \beta_s D \geq 0 \quad (4)$$

$$+ V_m D - V_m(1 - \beta_s)D - V_r \beta_s D - S_r \geq 0 \quad (5)$$

$$V_m \beta_s D - V_r \beta_s D - S_r \geq 0 \quad (6)$$

$$\beta_s D(V_m - V_r) - S_r \geq 0 \quad (7)$$

$$S_r \leq (V_m - V_r)(a\varsigma + b)D \quad (8)$$

In order to calculate the optimal remanufacturing times, the point must be found, where the derivative of the equation according to the number of years is equal to 0 given in equation (9).

$$\frac{d}{dx} \left(\frac{S_m}{(1 - (ax + b))D} + \frac{S_r}{(ax + b)D} + V_m(1 - (a\varsigma + b)) + V_r(a\varsigma + b) \right) = 0 \quad (9)$$

When the constraint given in equation (3) is written in the unit cost given in equation (2), the formula given in equation (10) is obtained.

$$\frac{d}{dx} \left(\frac{S_m}{(1 - (ax + b))D} + \frac{(V_m - V_r)(ax + b)D}{(ax + b)D} + V_m(1 - (a\varsigma + b)) + V_r(a\varsigma + b) \right) = 0 \quad (10)$$

When the derivative of the formula given in equation (10) is taken according to the number of remanufacturing times, the formula given in equation (11) is obtained.

$$\frac{aS_m}{(1 - (a\varsigma + b))^2 D} + a(V_r - V_m) = 0 \quad (11)$$

When the formula given in equation (11) is multiplied by the ratio of the demand $\left(\frac{D}{a}\right)$ to variable (a) , the formula given in equation (12) is obtained.

$$\frac{S_m}{(1 - (as + b))^2} + D(V_r - V_m) = 0 \tag{12}$$

When the denominators in equation (12) are eliminated, the formula is as given in equation (13).

$$S_m + D(V_r - V_m)(a^2s^2 + 2abs - 2as + b^2 - 2b + 1) = 0 \tag{13}$$

Equation (13) is an example of second-order polynomial equation, which means there are two roots (s_1, s_2) available when the equation is solved. The root having minimum positive value is the real solution of the equation.

3.4. Solution approach

Figure 2 presents a flowchart that illustrates the aforementioned proposed decision model with steps. In the first step (figure out the linear relation), the time-dependent change of disposal rate is modelled linearly. In the second step, the maximum number of remanufacturing times (t_{max}) is calculated to determine whether the solution that the model will produce is feasible. In the third step, values respectively for the average demand (D), remanufacturing setup cost (S_r), remanufacturing variable cost (V_r) and manufacturing variable cost (V_m) are assigned. In the fourth step, the optimal number of remanufacturing times (N_r^*) is calculated using the equation proved in the study. If the optimal number of remanufacturing times is greater than t_{max} , the result is set to 0 because the solution found is infeasible, so remanufacturing should not be performed as seen in fifth step. If the value found is less than the calculated product life cycle, it is optimal for remanufacturing the value obtained as shown in sixth step. Furthermore, the pseudo-code of this decision model is illustrated in Table 4.

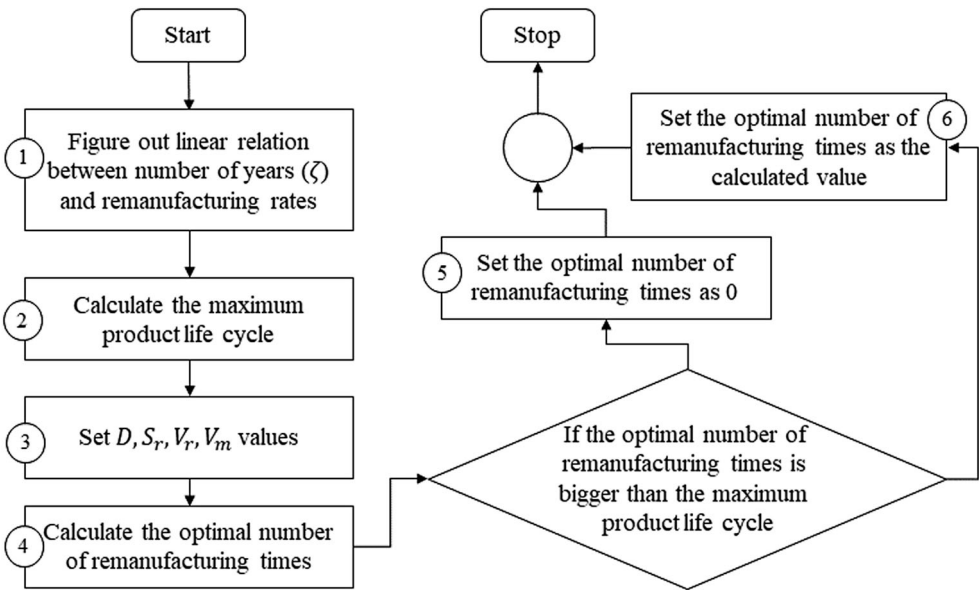


Figure 2. Flowchart of the solution approach.

Table 4. Pseudo-code of the proposed decision model.

1.	Procedure OptimalNumberOfRemanufacturingTimes (β_s, ζ)
2.	a, b = CalculateRegressionEquation ($x = \zeta, y = \beta_s$)
3.	Set t_{max} , as the maximum product life cycle
4.	Set demand (D), setup cost of remanufacturing (S_r), variable cost of remanufacturing (V_r), variable cost of manufacturing (V_m)
5.	x_1, x_2 = roots($S_m + D(V_r - V_m)(a^2s^2 + 2abs - 2as + b^2 - 2b + 1)$)
6.	If $x_1 < 0$ Then
7.	Set $s_1 = t_{max} + 1$
8.	End If
9.	If $x_2 < 0$ Then
10.	Set $s_2 = t_{max} + 1$
11.	End If
12.	$N_r^* = \min(s_1, s_2)$
13.	If $N_r^* > t_{max}$ Then
14.	Set $N_r^* = 0$
15.	End If
16.	return N_r^*

4. Analysis and simulation experiment

According to the world trade statistical review report of the World Trade Organization (WTO 2018), the chemical products are the most exported products after petroleum and mining products. Hence, there has been an increasing interest in remanufacturing in the chemical industry, including the plastics industry, which provides also cost advantages to companies. At this point, automobile components (dashboard, instrument panels and rigid profiles), construction elements (profiles, hoses, cables and flooring) or other commercial products (artificial leather and conveyor belts), which are PVC-based products chosen as an example of remanufacturing products within the scope of this study. The reason behind the selection of the pre-mentioned products is PVC that has a limited number of remanufacturing cycles.

In order to measure the behaviour of the developing decision model under different costs and demand conditions, a simulation system was developed using Java software language. Simulation scenarios were created by taking into account the parameters of demand, manufacturing setup cost, remanufacturing setup cost, manufacturing variable cost and remanufacturing variable cost. The results of simulation scenarios were further analysed using Java software toolkit. The ranges of values and increments of these parameters are given in Table 5. The number of simulation scenarios was calculated by applying the difference of ranges divided by increments per parameter, equals to 2.250.000. The parameters of the simulation scenarios were further determined (Cesur 2019). The parameters used in the thesis study were collected from articles (Carvalho and Nascimento 2016; Cunha and Melo 2016; Sifaleras and Konstantaras 2017), which are noted for the importance of manufacturing cost, inventory holding cost, transfer cost, fixed cost and remanufacturing cost for planning. Apart from the specified parameters, the estimated product life cycle of PVC taken from the report of ‘Mechanical Recycling of PVC Wastes’ published by the European Commission (EC 2000) is determined as 50 years, while a and b parameters specified in the model take -0.02 and 1 values.

Table 5. Parameters with range and increment values.

PARAMETER	RANGE	INCREMENT
DEMAND (D)	1000–25000	1000
MANUFACTURING SETUP COST (S_m)	5000–100000	5000
REMANUFACTURING SETUP COST (S_r)	5000–100000	5000
MANUFACTURING VARIABLE COST (V_m)	20–90	5
REMANUFACTURING VARIABLE COST (V_r)	20–90	5

5. Results and discussion

5.1. Scenario-based and parameter effect analysis

In this section, the five parameters given above are analysed in terms of scenario-based and parameter effect analysis to determine their effects on the optimal remanufacturing times (ORT). Apart from other studies, not only one value of pre-determined parameters is investigated, a range of values are simulated and analysed comprehensively.

5.1.1. Effect of demand

The ORT occurs in all combinations of manufacturing setup cost (S_m), remanufacturing setup cost (S_r), remanufacturing variable cost (V_r) and manufacturing variable cost (V_m) are averaged, while demand (D) ranges from 1000 to 25000. The reason for this is to observe the general mass trend. When the trend is analysed, similar remanufacturing characteristics are seen in demands of 7000 which is always decreasing above as shown in Figure 3. ORT ranges from 7 to 10 years, while average demand shortens when demand exceeds 7000. While demand is low, the gain from $V_m - V_r$ cannot handle the remanufacturing setup cost, so that few scenarios can also be remanufactured; thus, the year of optimal remanufacturing is low. When this situation in low demand is ignored, it is understood that the change in demand does not cause much change between ORT. When the correlation between demand and ORT is examined ($r = -0.15$), it is found that the correlation is close to 0.

5.1.2. Effect of cost

The effect of cost is considered in terms of setup cost and variable cost. Since production would be more advantageous than remanufacturing while the manufacturing setup cost (S_m) was low, ORT is less. However, when it reaches a certain level (like more than 70000), the effect of S_m disappears and is fixed in the simulation for an average of 9 years. In Figure 4, the general behaviour of S_m is observed.

With the constraint added in equation (9), S_r is out of the formula as shown in equation (10), and it is shown in Figure 5 below that there is no effect on ORT. Setup remanufacturing is directly related to whether remanufacture or not; however, there is no significant relationship between remanufacturing setup cost and ORT after deciding to remanufacture.

Manufacturing variable cost and remanufacturing variable cost have a direct impact on ORT. When this effect was measured by correlation, the strength of the relationship between V_m and ORT was $r = 0.9965$, whereas the strength of the relationship between V_r and ORT was $r = -0.9965$. The inverse ratio between the correlation values found in Figure 6 led to the symmetrical effects of V_m and V_r on ORT.

The effect of V_m and V_r on ORT is not directly from V_m and V_r , but from the difference $V_m - V_r$ given in equation (8). In cases, where the multiplication of remanufacturing rate with $V_m - V_r$ is smaller than S_r , the likelihood deteriorates because the constraint given in equation (8) is not provided. In the first 15 data set, where the difference of $V_m - V_r$ is less than 0, the ORT is 0 as shown in Figure 7. When the difference is more than 15, breakeven point appears. The reason for this fracture is the point where $V_m - V_r$ crosses S_r .

5.2. Unique contributions and managerial implications

There has been a little consideration in the literature about remanufacturing, which aim to find the number of remanufacturing times for resource management on a circular economy platform. The available literature has some limited scope and assumptions. For instance, offered models do not provide an optimal number of remanufacturing times directly, although the aim of such studies is to find it out. Also, they took just some product types manufactured with metals that have an infinite number of remanufacturing times. Specifically, two fundamental studies: (1) El Saadany, Jaber, and

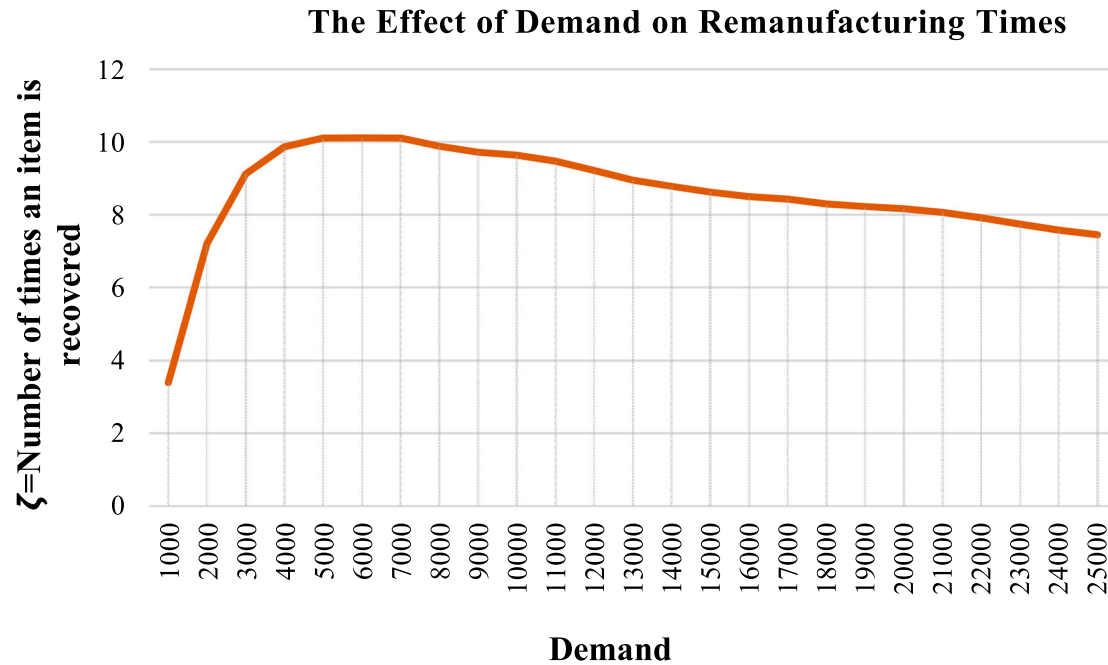


Figure 3. The effect of demand on optimal remanufacturing times.

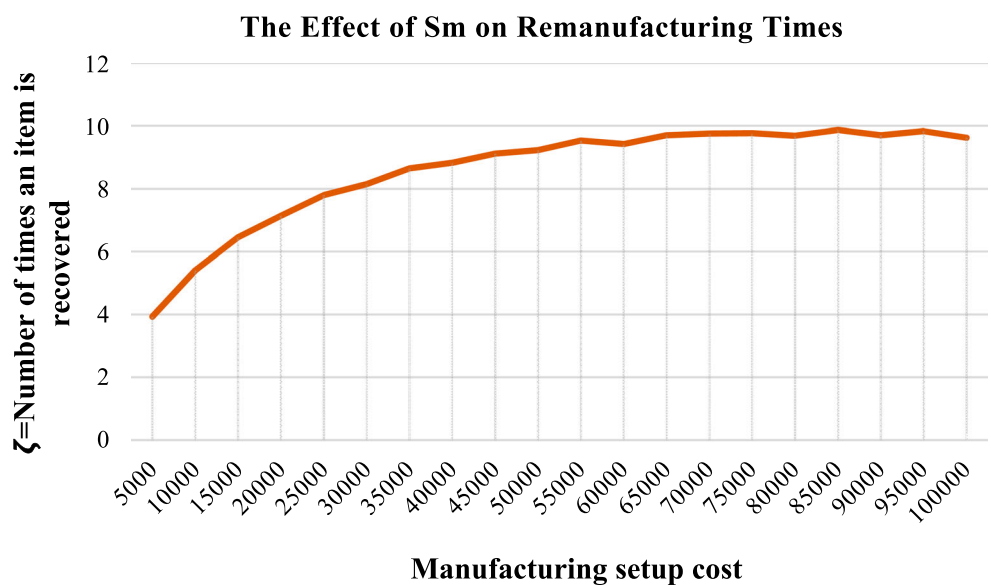


Figure 4. The effect of manufacturing setup cost on optimal remanufacturing times.

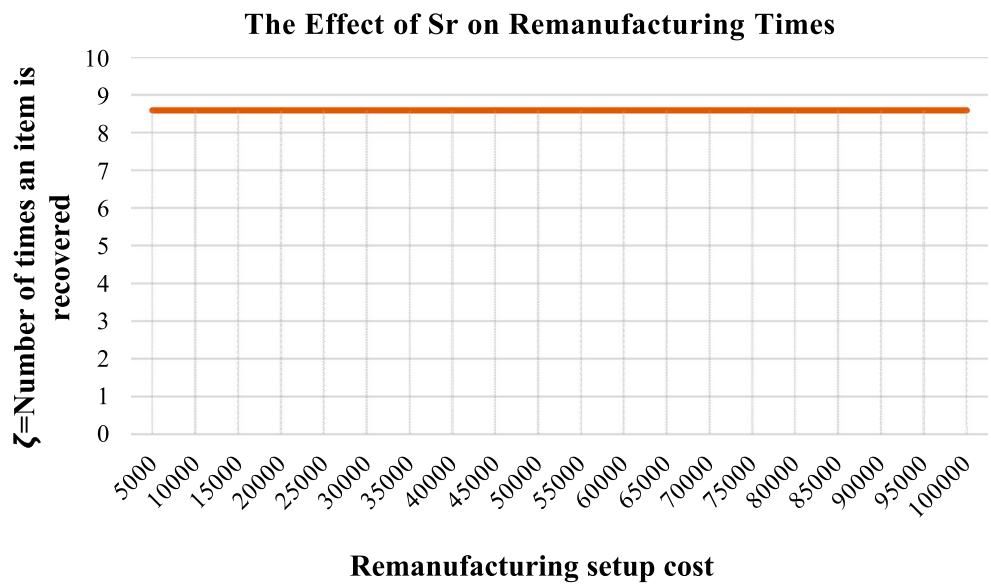


Figure 5. The effect of remanufacturing setup cost on optimal remanufacturing times.

Bonney (2013) just utilised the numerical analysis by changing remanufacturing times such as when $\zeta=1, 2, 3$, and ∞ in an attempt to predict the minimum total cost and (2) Teunter (2001) tried to find the lot size by considering the variable cost, fixed cost, unit cost and disposal. However, neither studies handle the problem as a discovery of the optimal number of remanufacturing times. In this study, the optimal number of remanufacturing times is calculated based on the point where the unit cost is minimised. When past studies are compared with this study, it is apparent to realise that the total minimum cost at the point of optimal remanufacturing times was not provided in their model until now. They did it only by brute force (trial-and-error) analyses. Besides that, it is known

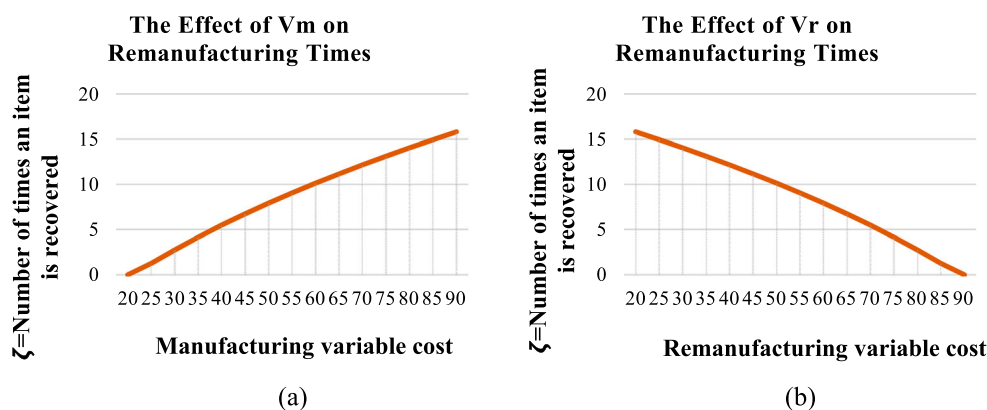


Figure 6. The effect of (a) manufacturing variable cost and (b) remanufacturing variable cost on optimal remanufacturing times.

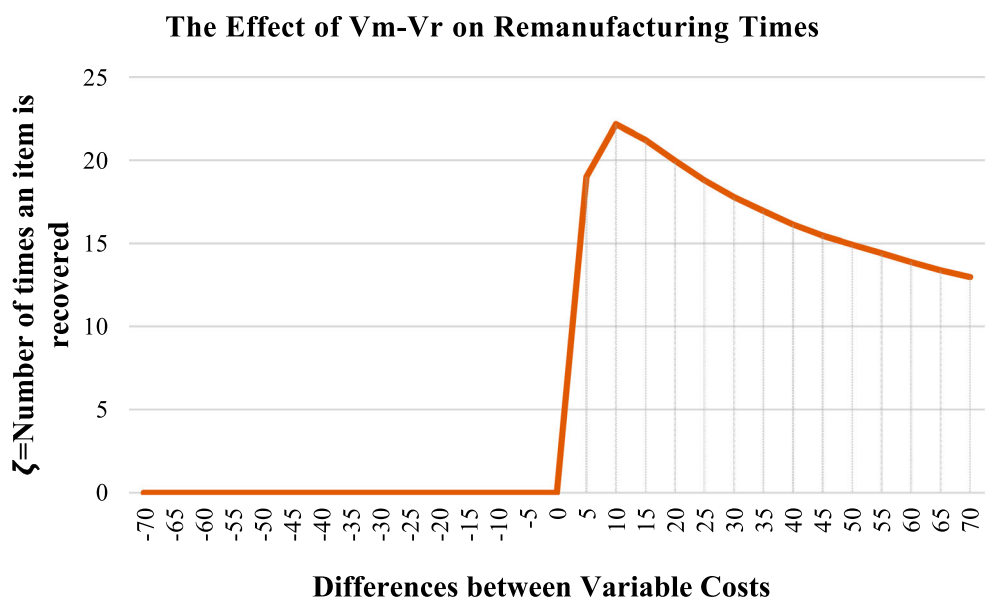


Figure 7. The effect of V_m-V_r cost on optimal remanufacturing times.

that the minimum cost ensures less raw material consumption, a reduced amount of manpower usage, less time, money and energy wastage; in other words, it increase the total resource efficiency.

6. Conclusion

When calculating the optimal number of remanufacturing times, demand, manufacturing setup cost, remanufacturing setup cost, manufacturing variable cost and remanufacturing variable cost are considered. Therefore, the model focuses on the profitability of the investment. The optimal number of remanufacturing times obtained in the model is the maximum product age that remanufacturing is profitable, which is the answer to the first research question.

Significant characteristics that differentiate the proposed decision model from the other models include the following: (i) This model calculates the optimal number of remanufacturing times directly to ensure maximum profitability, whereas the presented models in Teunter (2001) and El

Saadany, Jaber, and Bonney (2013)'s work calculate the optimal remanufacturing times only by brute force (trial-and-error). (ii) The remanufacturing rate (β) is not a fixed value, but a parameter expressed by a linear function, which is also the answer to the second research question.

The answer to the third research question can be summarised that the difference between variable costs of manufacturing and remanufacturing, demand, and setup cost of remanufacturing determine the optimal number of remanufacturing times directly, whereas the setup cost of manufacturing has no impact on it. Besides, doing the remanufacturing process does not seem to make sense, if the demand does not exceed a specific point. Further, it is concluded that any product can only be remanufactured a finite number of times before it is no longer economically feasible or practical to do so. At that point, it should be replaced with a newly manufactured product. In fact, in many cases, manufacturing and remanufacturing are mutually beneficial for companies to earn more profit.

The results of this study could be extended in the future by incorporating following cases: the remanufacturing rate (β) can be rendered non-linear, and the decision model can be expressed more accurately and flexibly. When calculating optimal remanufacturing times, the time value of money can also be expressed in future work.

Within the scope of this study, first, a mathematical model is proposed to find optimal remanufacturing times and parameters of the model are analysed by doing simulation experiments. As future research in terms of methodological features, the sensitivity analysis could be inserted to find a suitable range for each parameter. Thus, the model would be used as a decision support system for managers considering the behaviour of parameters. When remanufacturing is assessing from the point of environmental aspect, it is so clear that remanufacturing causes less consumption of not only raw material but also total energy in the production line. Besides that, how many times a product will be remanufactured at the most it could be possible to find the optimum point of total resource consumption such as transportation, raw material, manpower and energy should be known. Further, the objective function of the proposed mathematical model ensures the minimum unit cost by the finding the optimal number of remanufacturing times. At this point, it is obvious that firms can decrease prices in order to compete with other competitors in the market when they are aware of the minimum unit cost. The total demand practically increases just because they broaden their market share. Thereby, it brings about enhanced social welfare since both companies and users are placed well in the market.

Acknowledgements

The authors gratefully acknowledge the support provided by Scientific and Technological Research Council of Turkey (TÜBİTAK) for supporting two of the authors in data collection and model formalisation for this research.

Disclosure statement

No potential conflict of interest was reported by the author(s).

Funding

This work was supported by Scientific and Technological Research Council of Turkey (TÜBİTAK).

ORCID

Yasanur Kayikci  <http://orcid.org/0000-0003-2406-3164>

References

- Abdulrahman, M. D.-A., N. Subramanian, C. Liu, and S. Chengqi. 2015. "Viability of Remanufacturing Practice: A Strategic Decision Making Framework for Chinese Auto-Parts Companies." *Journal of Cleaner Production* 105: 311–323.

- Assid, M., A. Gharbi, and A. Hajji. 2019. "Production Planning of an Unreliable Hybrid Manufacturing–Remanufacturing System Under Uncertainties and Supply Constraints." *Computers & Industrial Engineering* 136: 31–45.
- Bazan, E., M. Y. Jaber, and A. M. A. El Saadany. 2015. "Carbon Emissions and Energy Effects on Manufacturing–Remanufacturing Inventory Models." *Computers & Industrial Engineering* 88: 307–316.
- Bazan, E., M. Y. Jaber, and S. Zanon. 2017. "Carbon Emissions and Energy Effects on a Two-Level Manufacturer–Retailer Closed-Loop Supply Chain Model with Remanufacturing Subject to Different Coordination Mechanisms." *International Journal of Production Economics* 183: 394–408.
- Bhattacharjee, S., and J. Cruz. 2015. "Economic Sustainability of Closed Loop Supply Chains: A Holistic Model for Decision and Policy Analysis." *Decision Support Systems* 77: 67–86.
- Bras, B. 2007. "Design for Remanufacturing Processes." In *Environmentally Conscious Mechanical Design*, edited by M. Kutz. Hoboken, NJ: John Wiley & Sons. doi:10.1002/9780470168202.ch8.
- Cao, J., X. Chen, X. Zhang, Y. Gao, X. Zhang, and S. Kumar. 2020. "Overview of Remanufacturing Industry in China: Government Policies, Enterprise, and Public Awareness." *Journal of Cleaner Production* 242: 118450.
- Carvalho, D. M., and M. C. Nascimento. 2016. "Lagrangian Heuristics for the Capacitated Multi-Plant Lot Sizing Problem with Multiple Periods and Items." *Computers & Operations Research* 71: 137–148.
- Cesur, M. R. 2019. "Design of Real-Time Manufacturing Planning and Control System Via Information Sharing." PhD Thesis. Sakarya University. Accessed from: <https://tez.yok.gov.tr/UlusalTezMerkezi/tezSorguSonucYeni.jsp>.
- Cunha, J. O., and R. A. Melo. 2016. "On Reformulations for One-Warehouse Multi-Retailer Problem." *Annals of Operations Research* 238: 99–122.
- Dobos, I., and K. Richter. 2004. "An Extended Production/Recycling Model with Stationary Demand and Return Rates." *International Journal of Production Economics* 90 (3): 311–323.
- EC. 2000. *Mechanical Recycling of PVC Wastes*. Final report. European Commission. Accessed from: https://ec.europa.eu/environment/waste/studies/pvc/mech_recycle.pdf.
- El Saadany, A. M. A., and M. Y. Jaber. 2008. "The EOQ Repair and Waste Disposal Model with Switching Costs." *Computers and Industrial Engineering* 55 (1): 219–233.
- El Saadany, A. M. A., and M. Y. Jaber. 2010. "A Production/Remanufacturing Inventory Model with Price and Quality Dependent Return Rate." *Computers and Industrial Engineering* 58 (3): 352–362.
- El Saadany, A. M. A., M. Y. Jaber, and M. Bonney. 2013. "How Many Times to Remanufacture?" *International Journal of Production Economics* 143 (2): 598–604.
- Farahani, S., W. Otieno, and T. Omwando. 2019. "The Optimal Disposition Policy for Remanufacturing Systems with Variable Quality Returns." *Computers & Industrial Engineering* 140: 106218.
- Flapper, S. D. P., J. van Nunen, and L. N. van Wassenhove. 2006. *Managing Closed-Loop Supply Chains*. Springer Science & Business Media.
- Fleischmann, M., J. M. Bloemhof-Ruwaard, R. Dekker, E. van der Laan, J. A. E. E. van Nunen, and L. N. van Wassenhove. 1997. "Quantitative Models for Reverse Logistics: A Review." *European Journal of Operational Research* 103 (1): 1–17.
- Gandhi, S., S. K. Mangla, P. Kumar, and D. Kumar. 2016. "A Combined Approach Using AHP and DEMATEL for Evaluating Success Factors in Implementation of Green Supply Chain Management in Indian Manufacturing Industries." *International Journal of Logistics Research and Applications* 19 (6): 537–561.
- Genovese, A., A. A. Acquaye, A. Figueroa, and S. C. L. Koh. 2017. "Sustainable Supply Chain Management and the Transition Towards a Circular Economy: Evidence and Some Applications." *Omega* 66: 344–357.
- Govindan, K., H. Soleimani, and D. Kannan. 2015. "Reverse Logistics and Closed-Loop Supply Chain: A Comprehensive Review to Explore the Future." *European Journal of Operational Research* 240 (3): 603–626.
- Guo, J., and G. Ya. 2015. "Optimal Strategies for Manufacturing/Remanufacturing System with the Consideration of Recycled Products." *Computers and Industrial Engineering* 89: 226–234.
- Hasanov, P., M. Y. Jaber, and N. Tahirov. 2019. "Four-Level Closed Loop Supply Chain with Remanufacturing." *Applied Mathematical Modelling* 66: 141–155.
- Ilgin, M. A., and S. M. Gupta. 2010. "Environmentally Conscious Manufacturing and Product Recovery (ECMPRO): A Review of the State of the Art." *Journal of Environmental Management* 91: 563–591.
- Ilgin, M. A., and S. M. Gupta. 2012. *Remanufacturing Modeling and Analysis*. FL, Boca Raton: CRC Press.
- Islam, M. S., S. Moeinzadeh, M.-L. Tseng, and K. Tan. 2020. "A Literature Review on Environmental Concerns in Logistics: Trends and Future Challenges." *International Journal of Logistics Research and Applications*. doi:10.1080/13675567.2020.1732313.
- Jayaraman, V., A. D. Ross, and A. Agarwal. 2008. "Role of Information Technology and Collaboration in Reverse Logistics Supply Chains." *International Journal of Logistics: Research and Applications* 11 (6): 409–425. doi:10.1080/13675560701694499.
- Kazancoglu, Y., E. Ekinici, S. K. Mangla, M. D. Sezer, and Y. Kayikci. 2020. "Performance Evaluation of Reverse Logistics in Food Supply Chains in a Circular Economy Using System Dynamics." *Business Strategy and the Environment*, 1–21. doi:10.1002/bse.2610.

- Lei, Y., W. Guoyu, and K. Chenxu. 2018. "Remanufacturing and Promotion in Dual-Channel Supply Chains Under Cap-and-Trade Regulation." *Journal of Cleaner Production* 204: 939–957.
- Li, Y., L. Feng, K. Govindan, and F. Xu. 2019. "Effects of a Secondary Market on Original Equipment Manufactures' Pricing, Trade-in Remanufacturing, and Entry Decisions." *European Journal of Operational Research* 279 (3): 751–766.
- Lieckens, K. T., P. J. Colen, and M. R. Lambrecht. 2013. "Optimization of a Stochastic Remanufacturing Network with an Exchange Option." *Decision Support Systems* 54 (4): 1548–1557.
- Liu, Z., C. Diallo, J. Chen, and M. Zhang. 2019. "Optimal Pricing and Production Strategies for New and Remanufactured Products Under a Non-Renewing Free Replacement Warranty." *International Journal of Production Economics* 226: 107602.
- Madaan, J., P. Kumar, and F. T. Chan. 2012. "Decision and Information Interoperability for Improving Performance of Product Recovery Systems." *Decision Support Systems* 53 (3): 448–457.
- Nahmias, N., and H. Rivera. 1979. "A Deterministic Model for a Repairable Item Inventory System with a Finite Repair Rate." *International Journal of Production Research* 17 (3): 215–221.
- Rathore, P., S. Kota, and A. Chakrabarti. 2011. "Sustainability Through Remanufacturing in India: A Case Study on Mobile Handsets." *Journal of Cleaner Production* 19 (15): 1709–1722.
- Richter, K. 1996a. "The EOQ and Waste Disposal Model with Variable Setup Numbers." *European Journal of Operational Research* 95: 313–324.
- Richter, K. 1996b. "The Extended EOQ Repair and Waste Disposal Model." *International Journal of Production Economics* 45 (1-3): 443–448.
- Richter, K. 1997. "Pure and Mixed Strategies for the EOQ Repair and Waste Disposal Problem." *OR Spectrum* 19 (2): 123–129.
- Schrady, D. A. 1967. "A Deterministic Inventory Model for Repairable Items." *Naval Research Logistics Quarterly* 14 (3): 391–398.
- Schwanzhold, J., and S. Leipold. 2020. "Sharing for a Circular Economy? An Analysis of Digital Sharingplatforms' Principles and Business Models." *Journal of Cleaner Production* 269: 122327.
- Sifaleras, A., and I. Konstantaras. 2017. "Variable Neighborhood Descent Heuristic for Solving Reverse Logistics Multi-Item Dynamic Lot-Sizing Problems." *Computers and Operations Research* 78: 385–392.
- Singhal, D., S. Tripathy, and S. K. Jena. 2020. "Remanufacturing for the Circular Economy: Study and Evaluation of Critical Factors." *Resources, Conservation and Recycling* 156: 104681.
- Sitcharangsie, S., W. Ijomah, and T. C. Wong. 2019. "Decision Makings in Key Remanufacturing Activities to Optimise Remanufacturing Outcomes: A Review." *Journal of Cleaner Production* 232: 1465–1481.
- Teunter, R. H. 2001. "Economic Ordering Quantities for Recoverable Item Inventory Systems." *Naval Research Logistics* 48: 484–495.
- Teunter, R. H. 2002. "Economic Order Quantities for Stochastic Discounted Cost Inventory Systems with Remanufacturing." *International Journal of Logistics Research and Applications* 5 (2): 161–175.
- Van Nguyen, T., L. Zhou, A. Y. L. Chong, B. Li, and X. Pu. 2020. "Predicting Customer Demand for Remanufactured Products: A Data-Mining Approach." *European Journal of Operational Research* 281 (3): 543–558.
- Wang, Y., Z. Jiang, X. Hu, and C. Li. 2020. "Optimization of Reconditioning Scheme for Remanufacturing of Used Parts Based on Failure Characteristics." *Robotics and Computer-Integrated Manufacturing* 61: 101833.
- WTO. 2018. *World Trade Statistical Review*. Report. World Trade Organization. Accessed from: https://www.wto.org/english/res_e/statis_e/wts2018_e/wts2018_e.pdf.
- Zhang, X., M. Zhang, H. Zhang, Z. Jiang, C. Liu, and W. Cai. 2020. "A Review on Energy, Environment and Economic Assessment in Remanufacturing Based on Life Cycle Assessment Method." *Journal of Cleaner Production* 255: 120160.
- Zhen, L., L. Huang, and W. Wang. 2019. "Green and Sustainable Closed-Loop Supply Chain Network Design Under Uncertainty." *Journal of Cleaner Production* 227: 1195–1209.
- Zhu, X., M. Ren, W. Chu, and R. Chiong. 2019. "Remanufacturing Subsidy or Carbon Regulation? An Alternative Toward Sustainable Production." *Journal of Cleaner Production* 239: 117988.